

SMC7904WBRAS-N

4-Port Wireless Annex A ADSL2/2+ Modem Router

Product Overview

SMC7904WBRAS-N, is a highly integrated residential broadband access device which combines the function of ADSL modem, wireless N access point and 4-ports Ethernet router. SMC7904WBRAS-N is fully compliant with latest ADSL2/2+ and Ethernet standards like IEEE802.3/802.3u, it is also TR-067 compliant, ensuring the interoperability with your ISP's network infrastructure.

SMC7904WBRAS-N provides high performance access to the Internet, downstream up to 24Mbps and upstream up to 2Mbps, making it ideal for individual users, SOHOs, and small enterprises. With SMC7904WBRAS-N, computers on the LAN side can communicate and share the Internet access and files with each other wired or wirelessly.



Key Features and Benefits

Enhanced ADSL2+ Technology

Instant always on Internet connectivity for wired computers. The built-in ADSL2/2+ modem gives unrivaled asymmetric high-speed data transfer rates with up to 24Mbps downstream.


Robust Security and Firewall Protection from Hackers

The NAT firewall with Stateful Packet Inspection (SPI), Intrusion Detection System & Denial-of-Service provides robust security from hackers while VPN pass-through allows secure connectivity to your office or corporate network. Access Control Lists with URL blocking allow you to control access to Internet services & filter inappropriate web sites.

Quality of Service (QoS)

The SMC7904WBRAS-N includes a build in QoS engine, which allow network administrators to allocate network resource and to prioritize real-time applications like voice & video, to enable smooth Internet phone (VoIP) and lag-free online gaming. WMM (WiFi Multimedia) delivers QoS to the wireless network, while IP QoS prioritizes outbound internet traffic.

Application Diagram

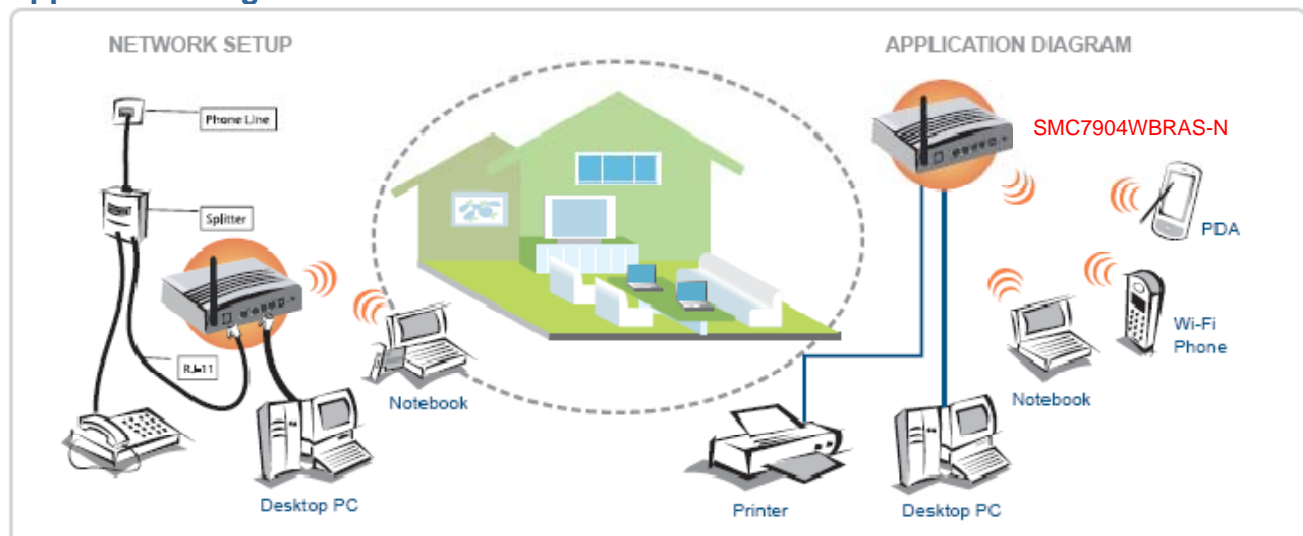

Features

HARDWARE

Physical Interface

- 1 RJ-11 Jack for ADSL Interface
- 4 RJ-45 Jacks for 10/100 Base-Tx Ethernet Ports
- 1 Reset Button
- 1 Power DC jack
- 1 Power On / Off Switch

LED Indicators

- Power/ Link/ WLAN/ LAN/ WPS

SOFTWARE

ADSL Compliance

- G.992.1 (G.dmt) Annex A
- G.992.2 (G.lite) Annex A
- G.992.3 ADSL2 (G.dmt.bis) Annex A/J/K/L/M
- G.992.4 ADSL2 (G.lite.bis)
- G.992.5 ADSL2+ Annex A/M

ATM Features

- Support up to 8 ATM PVCs
- Supports ATM Forum UNI 3.1/4.0 PVC
- Supports UBR, CBR, and rt-VBR and nrt-VBR service classes
- Provides ATM layer functionality
- Support up to 8 PVCs – traffic shaping (CBR, UBR, rt/nrt-VBR)
- Supports PPPoA (RFC2364)
- Supports MPoA functionality (RFC2684)
- Supports IP over ATM (IPoA)
- Support ATM cell format ITU -T I.361
- Supports OAM F4/F5 loopback

PPP Functions

- RFC1662 PPP in HDLC-like Framing
- PPP over ATM (RFC2364)
- PPP over Ethernet (RFC2516)
- User Authentication
 - CHAP (RFC1994)
 - PAP (RFC1334)

Bridge Features

- Ethernet bridging
- Support Transparent Bridging
 - MAC address learning
 - MAC address filtering and protocol filtering for up-link

Routing Features

- RIP v1 / v2
- Static routing
- PPP / PPPoE (RFC 2516)
- NAT with ALGs
- NAT
- IGMP v1 / v2 / V3
- IGMP Proxy / snooping
- IPv4
- IP pass through
- Virtual Server port forwarding

VLAN Support

- VLAN pass-through

DDNS Support

- Dynamic DNS feature supported

WLAN Support

- Hide SSID
- Multiple SSID
- Support WMM
- WEP Encryption (64/128 bit)
- WPA-TKIP/PSK, WPA2-AES/PSK
- 802.1X
- MAC address filtering
- Configure RTS/CTS; Fragmentation Threshold; Beacon Interval
- Configurable transmit power level and data rate
- Compliant with IEEE802.11b/g/n standards, high access to the Internet wirelessly

Security

- Stateful Packet Inspection (SPI)
- Management Access Control for WAN
- User authentication for PPP (PAP / CHAP)
- DDoS (Dynamic DoS) Protection

Firewall

- NAT
- DMZ
- Filtering – IP Filtering, MAC Filtering, URL Filtering
- Attack Prevent (IP Land, Port Scan)
- VPN (IPSec, PPTP, L2TP) pass-through

Management

- Access Administration
- Web based Configuration - HTTP server
- System configuration backup and restore
- SNMP Support (V.1 and V.2C) – MIB I, MIB II (RFC1213)
- Firmware Upgrade Available by Web / TFTP
- Remote Firmware Upgradeable
- UPnP
- Easy Setup Wizard
- TR069 Remote Management Diagnostic and ATM loop back
- TR067 Ensures product meets all ADSL IOT test

QoS

- IP ToS function (RFC 1349)
- 802.1p bit remarking
- Traffic classification by port, 802.1p, ToS and DSCP

Dimension

- (L)182*(W)120*(H)22.4mm
- Box
- (L) 250*(W)200 *(H)72mm

Operating Environment

- 0° C ~ 40° C/ 32° F ~ 104° F
- 10% ~ 80% Non-condensing

Certifications

- FCC Class B
- CE Mark
- RoHS compliant

Warranty

- Please check www.smc.com for the warranty terms in your country/region.

Contact

Edgecore Networks Corporation
 No. 1 Creation Rd, III,
 Science-based Industrial Park,
 Hsinchu 30077, Taiwan, R.O.C.
 Phone: +886 3 563 8888
 Fax: +886 3 668 6111