

TC-NC9000S3E-MP-E

1.3MP Full HD Network Camera




Key Features:

- 1.3 Megapixel 1/3" NIR CMOS Image sensor
- ARM 9 framework, embedded SOC system
- H.264 video compression and JPEG image capture
- Maximum resolution of 960P @ 30fps
- Dual encoding streams supported
- Support ICR true Day/Night
- Support dual-stream transmission, Vice stream D1@30FPS
- Support C/CS Auto Iris Lens
- Support IOS/Android/Windows mobile phone browse & control
- Automatically obtain IP (DHCP), automatic dialing (PPPOE), automatic port mapping (UPnP), DNS (DDNS)
- Support DC12V supply
- Built-in Web server, NVR, CMS
- Support POE, Micro SD Card
- TVS 4000V Protection

DIMENSION

Unit : mm

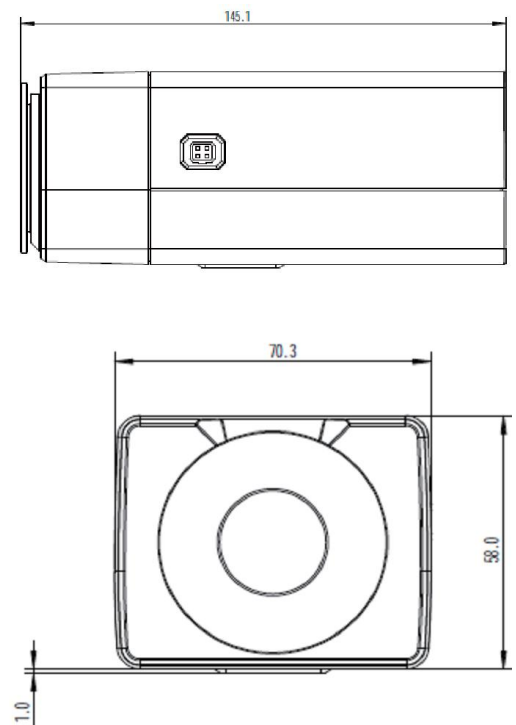

SPECIFICATIONS:

Model	TC-NC9000S3E-MP-E
Camera	
Image sensor	1.3MP, 1/3" NIR CMOS Image sensor
core processor	ARM9 Architecture processor
operating system	Embedded LINUX
Effective Pixels	1.3 M
Image resolution	Main stream: 960P(1280x960); Second stream:D1(704x576)
Frame rate	PAL: 960P@25 F/S NTSC: 960P@30 F/S
WDR	100db
Electronic Shutter	1/25S to 1/10000S
Minimum Illumination	Color0.05 Lux @(F1.2, AGC ON) B/W0.01Lux @(F1.2, AGC ON)
Day/Night	ICR
Video parameters	Contrast, brightness, saturation can be adjusted independently
Image processing	Support 3D noise reduction, de-interlace, image enhancement, edge enhancement, backlight compensation, gamma adjustment
Lens	
Lens interface type	C/CS
Interface	
Video interface	1Vp-p Composite Output(75Ω/BNC)
Audio interface	1 channel input; 1 channel output
Alarm interface	1 channel input
Network Port	10/100MEthernet interface RJ45
Protocol	Onvif
Encode Mode	
Video Compression	H.264/MJPEG
Audio Compression	G.711/G.726/ADPCM
Encode type	Baseline Profile/ Main Profile
Video Compression code rate	32K to 8Mbps
Audio Compression code rate	8K to 48Kbps
Others	
IE browser	Web server
Mobile	Support IOS/Android/Windows Mobile
Client	≤8
Local storage	Support MicroSD card, max 32G
Network protocol	TCP/UDP/HTTP/MULTICAST/UPnP/DHCP/PPPoE/DDNS/NFS/FTP/NTP/RTP/RTSP
IP address	Support static state IP address/DDNS
OSD character	Support character, time, support max 128 characters
Authority	4 level/128 users
System clock	Build-in clock, support external synchronization
Remote management	Remote network upgrade
Intelligent alarm	Motion detection, Port alarm
General	
Ingress Protection	IP66
Operating Environment	-30°C to 60°C, 0 to 95% RHG
Power Supply	DC 12V±10%
Power Consumption	5 W
Dimension	145mm×71mm×58mm
Weight	0.6 Kg

NOTE: ADINO TELECOM LTD reserves the right, without notification, to make changes in product design or specifications